

210 BAY Series

STANDARDS

- 750 GPH Aerator and 1000 GPH Bilge Pump
- All Welded .100" (.25 cm) Marine Grade Aluminum, One-Piece Bottom
- Closed Cell Foam Flotation
- Stainless Steel Cleats (4)
- Extruded Aluminum Tubular Transom
- Extruded Aluminum V Stern and Formed in Keels
- Heavy Duty Gunwales w/Acessa Track
- Longitudinal Stringer System
- Navigational Lights
- NextWave Electrical System
- NMMA Certified to ABYC Specifications
- Reinforced Stainless Steel Bow and Stern Eyes
- Reverse Chine Hull
- Drilled Transom

EXTERIOR

- High Gloss Metallic Paint - Available in Multiple Colors & Styles

HELM

- 12V Recept
- Anti-Feedback Steering
- Combo Bow Light with Horn
- Fiberglass Console with Windshield
- Speedometer, Tachometer, Voltmeter, Tilt/Trim & Fuel

INTERIOR


- Leaning Post
- Jump Seats
- Two (2) Fishing Seat Assemblies
- Auto/Manual Livewell Timer
- Composite Aerated Livewell (25 Gallon)
- Bow Casting Deck with Pedestal Base
- Stern Casting Deck with Pedestal Base

TRAILERS

- Black Trailer, Single Axle Standard
- Hold Down Straps
- Metal Wheel Fenders - Able to Stand On
- LED Lights
- Radial Tires
- Swing Tongue
- Three Cross Members/4 Bunks

POPULAR OPTIONS

- Mooring Cover
- Tilt Steering w/Anti Feedbk.
- Trailer/Wheel Upgrades
- Lowrance/Humminbird Electronics Upgrades
- On-Board Charger System
- Minn-Kota/Motor Guide Trolling Motor Upgrades

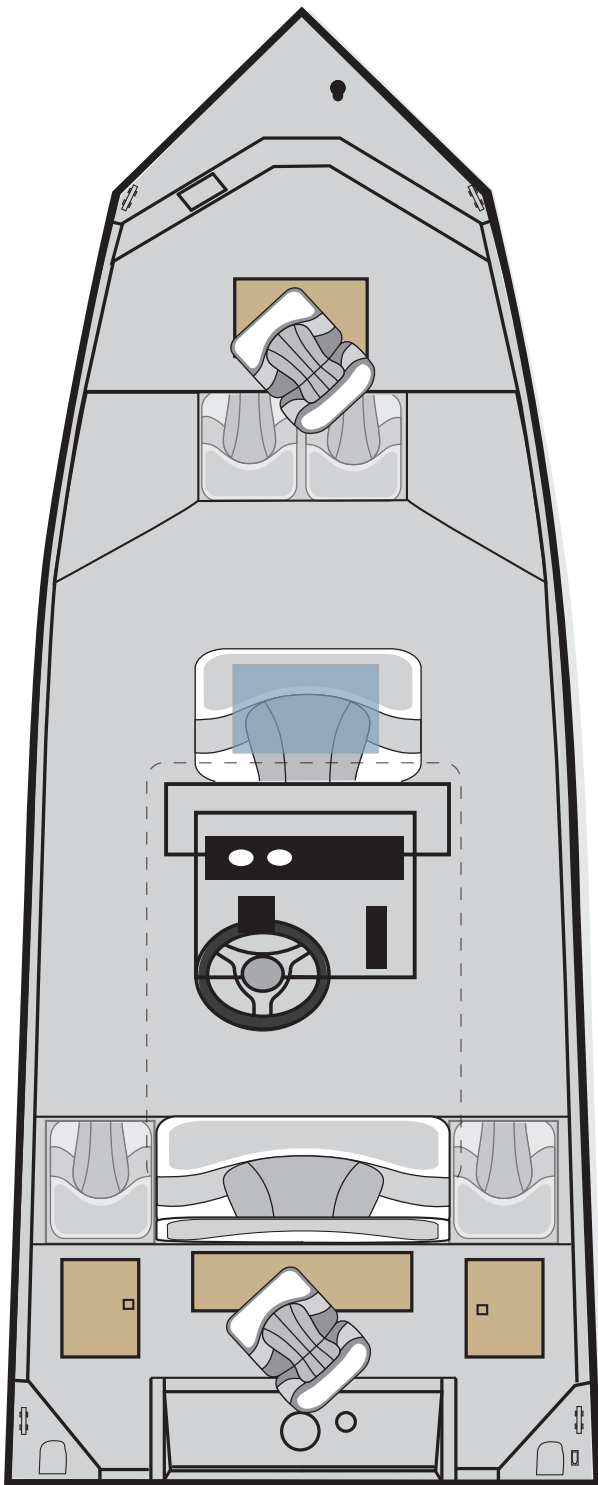

SPECIFICATIONS

Overall Length (ft/m)	20' - 4" / 6.18
Beam (in/cm)	96" / 244
Bottom Width (in/cm)	69" / 175
Maximum HP/kw	150 / 112

POLAR KRAFT

300 E. Chicago St. • Syracuse, IN 46567

www.POLARKRAFT.com