


OUTLANDER 156SC

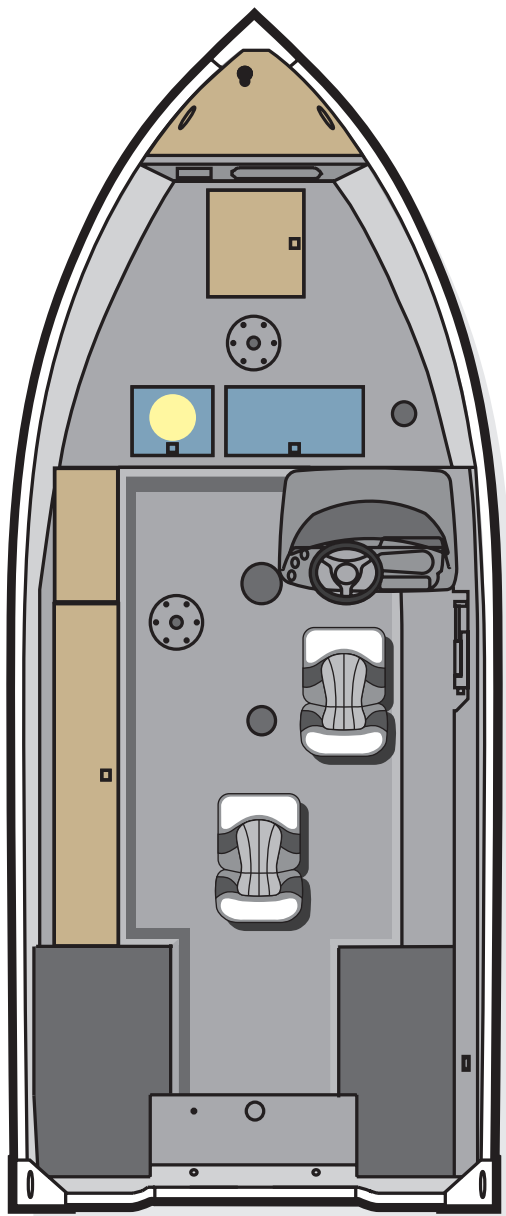

SPECIFICATIONS

Overall Length	15'- 6"
Beam	81"
Maximum HP	50 HP
Approx. Wet Weight	1,476 lbs.
Approx. Dry Weight	776 lbs.
Fuel Capacity	Portable
Person Capacity	4

STANDARDS

- 750 GPH Aerator and 1000 GPH Bilge Pump
- .072" (.18 cm) Marine Grade Aluminum, One-Piece Bottom
- Closed Cell Foam Flotation, Including Under Lids
- Composite Mooring Cleats (4)
- Bow Castings
- Extruded Aluminum Keels
- Extruded Aluminum Spray Rails
- Longitudinal Stringer System
- Navigational Lights
- NextWave Electrical System
- NMMA Certified to ABYC Specifications
- Reinforced Stainless Steel Bow and Stern Eyes
- Reverse Chine Hull
- 3-Piece Hull w/Double Riveted Seams
- Drilled Transom

EXTERIOR

- High Gloss Metallic Paint - Available in Multiple Colors & Styles
- 45 Edge 50" 12V

HELM

- Lowrance Hook 4X Fish Finder
- 12V Recept
- Non Feedback Steering
- Combo Bow Light with Horn
- Aluminum Side Console with ABS Cover & Windshield
- Speedometer, Tachometer, Voltmeter, Tilt/Trim

INTERIOR

- 6 Gauge 12/24V Trolling Motor Harness
- Auto/Manual Livewell Timer
- Aluminum Aerated Livewell (25 Gallon) - Bow
- Bow Casting Deck with Pedestal Base
- Lockable Rod Storage (9 Rods - 8.5')
- Two Fold Down Bass Seats
- 100% Vinyl Interior

TRAILERS

- Black Trailer, Single Axle Standard
- Hold Down Straps
- Metal Wheel Fenders - Able to Stand On
- Radial Tires
- Swing Tongue
- Two Cross Members/2 Bunks

POPULAR OPTIONS

- Mooring Cover
- Seat & Flooring Upgrades
- Trailer/Wheel Upgrades
- Lowrance/Humminbird Electronics Upgrades
- On-Board Charger System
- Minn-Kota/Motor Guide Trolling Motor Upgrades

POLAR KRAFT

300 E. Chicago St. • Syracuse, IN 46567

www.POLARKRAFT.com