

SPORTX 210 CC

STANDARDS

- 750 GPH Aerator and 1000 GPH Bilge Pump
- All Welded .100" (.25 cm) Marine Grade Aluminum, One-Piece Bottom
- Closed Cell Foam Flotation
- Heavy Duty Gunwales w/Acessa Track
- Composite Mooring Cleats (4)
- Extruded Aluminum Tubular Transom
- Extruded Aluminum V Stern and Formed in Keels
- Longitudinal Stringer System
- Navigational Lights
- NextWave Electrical System
- NMMA Certified to ABYC Specifications
- Reinforced Stainless Steel Bow and Stern Eyes

EXTERIOR

- OD Green Paint Standard - Available in Camouflage or other colors

HELM

- 12V Recept
- Aluminum Center Console with Windshield
- Non Feedback Steering
- Combo Bow Light with Horn
- Control Switches Std. (Single, Multi-Function Gauge: Including Tach, Fuel Level, and Voltage Optional)

INTERIOR


- Leaning Post
- 6 Gauge 12/24V Trolling Motor Harness
- Aluminum Aerated Livewell (18 Gallon)
- Aluminum Aerated Livewell (75 Gallon) - Rear
- Bow Casting Deck with Pedestal Base
- Stern Casting Deck with Pedestal Base
- 2 Bass Seats

TRAILERS

- Black Trailer, Single Axle Standard
- Hold Down Straps
- Metal Wheel Wheel - Able to Stand On
- Radial Tires
- Swing Tongue
- Two Cross Members/2 Bunks

POPULAR OPTIONS

- Seat Upgrades
- Trailer/Wheel Upgrades
- Lowrance/Humminbird Electronics Upgrades
- On-Board Charger System
- Minn-Kota/Motor Guide Trolling Motor Upgrades
- Tundra-Coat on Floor

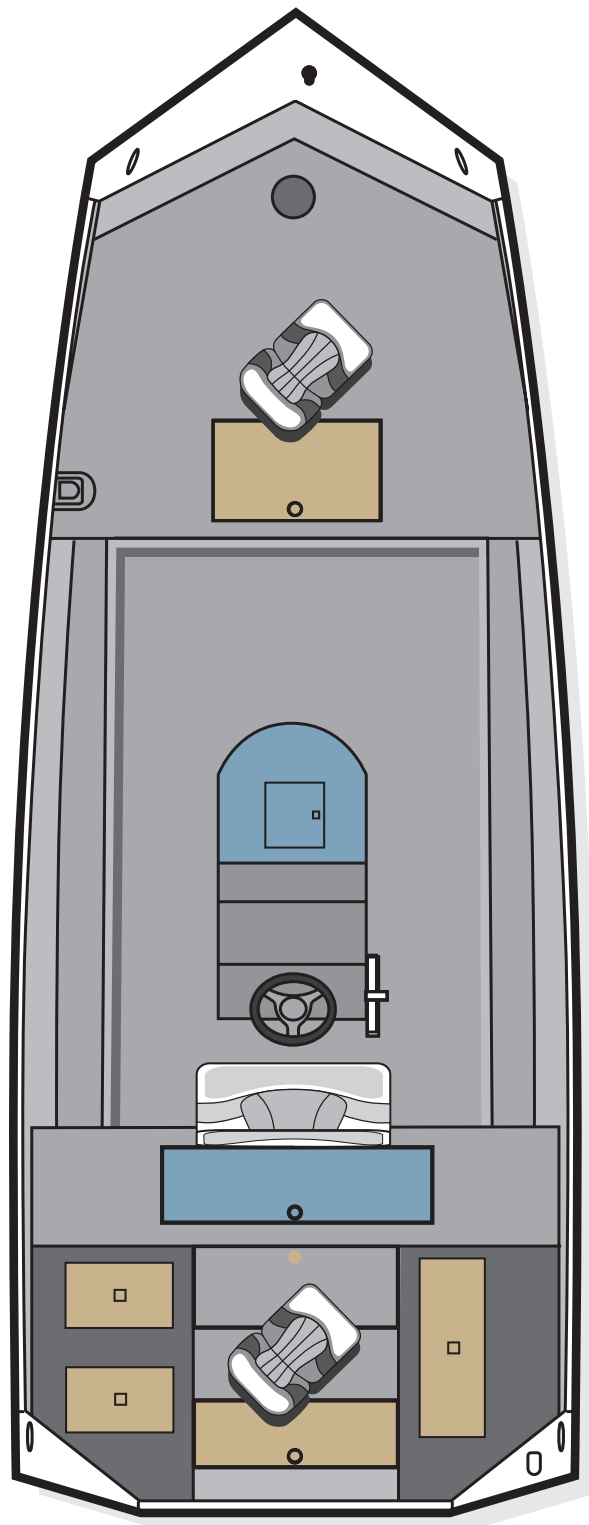

SPECIFICATIONS

Overall Length (ft/m)	20'- 4" / 6.18
Beam (in/cm)	96" / 244
Bottom Width (in/cm)	69" / 175
Maximum HP/kw	200 / 149

POLAR KRAFT

300 E. Chicago St. • Syracuse, IN 46567

www.POLARKRAFT.com